



VW-34T1




Full Bore 1/4"~2"(DN 8~ DN 50)
 Handle with locking device
 Blow-out-proof stem design
 Anti-Static design
 Body:Stainless steel,Carbon steel,Special Alloy steel
 Ball: SS 316
 Stem:SS 316
 Seat: PTFE +15% GF
 End Connections:Threaded End/Socked Weld End
 Butt Weld End/Flanged End
 Clamp End/Tube End
 Temperature Range: -4 to 356°F(-20 to 180°C)
 Threaded Type:NPT / BSP / DIN / BSPT
 FACE TO FACE TO DIN 3203M3

Dimensions

Unit : inch

VALVE SIZE	A	L	H	P	S	M
1/4"	11.5	72.5	9.5	9.0	36.0	6.0
3/8"	12.6	72.5	9.5	9.0	36.0	6.0
1/2"	15.0	72.5	9.5	9.0	36.0	6.0
3/4"	20.0	85.4	9.5	9.0	36.0	6.0
1"	25.0	105.5	14.5	11.0	42.0	6.0
1-1/4"	32.0	111.0	14.5	11.0	42.0	6.0
1-1/2"	38.1	120.0	16.5	14.0	50.0	7.0
2"	50.8	140.0	16.5	14.0	50.0	7.0

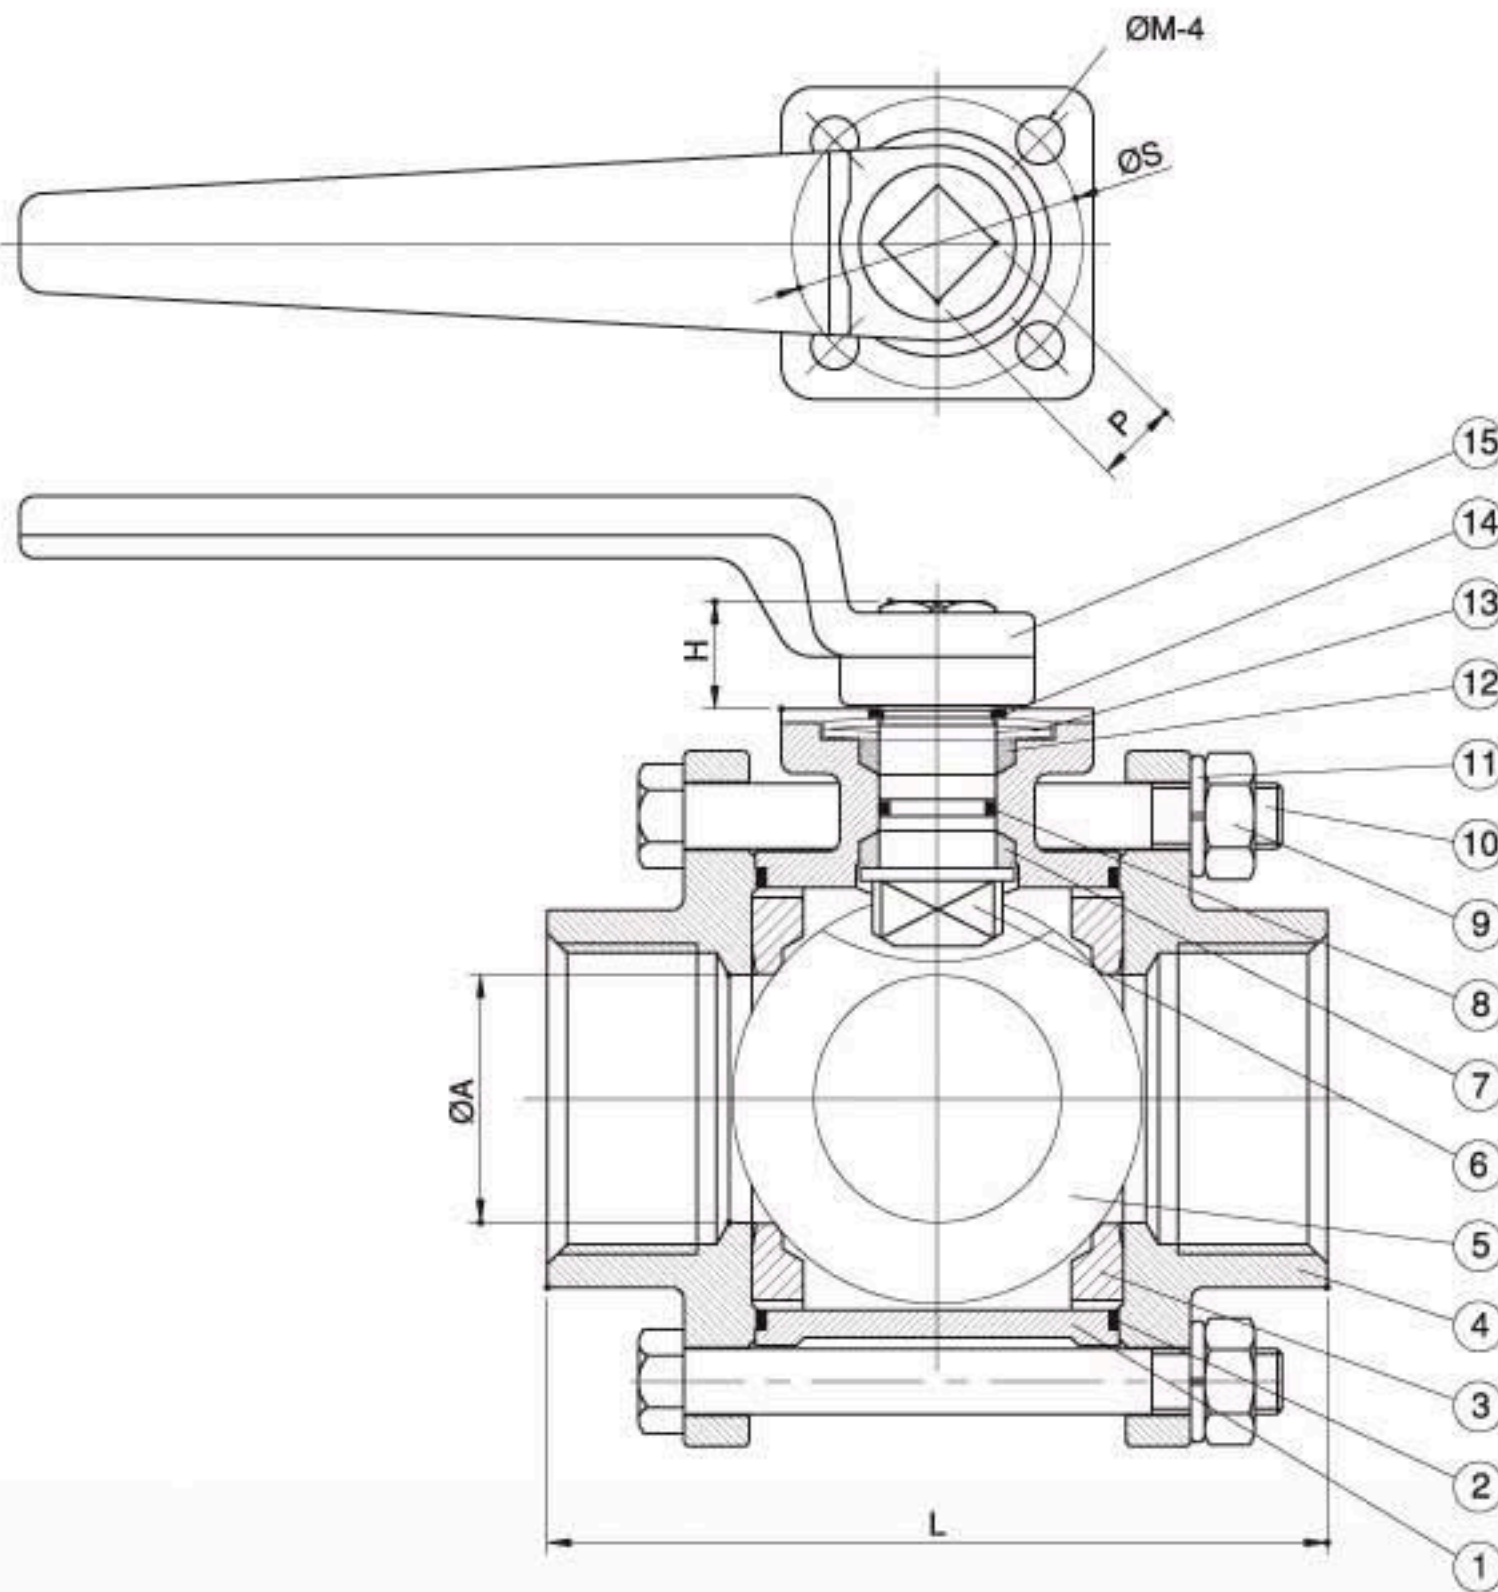

Material

NO.	PART NAME	MATERIAL
1	BODY	ASTM A351 Gr. CF8M
2	BODY SEAL	PTFE.
3	SEAT	RTFE.(+15% G/F)
4	END CAP	ASTM A351 Gr. CF8M
5	BALL	ASTM A351 Gr. CF8M
6	STEM	SS 316
7	THRUST WASHER	PTFE.
8	O-RING	VITON
9	NUT	SS 304
10	BOLT	SS 304
11	WASHER	SS 304
12	STEM PACKING	PTFE.
13	BELLEVILLE WASHER	SS 301
14	SNAP RING	SS 304
15	HANDLE	FCD45